


# OT11141

## COM Express Module Carrier Card

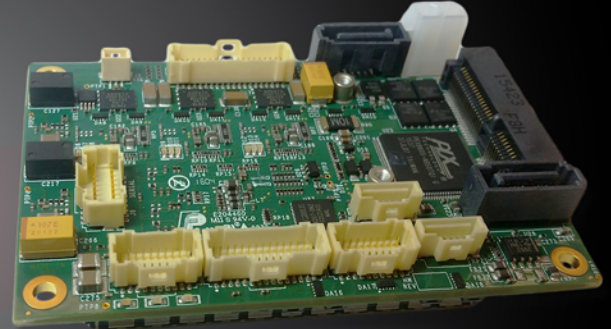

### Power and Flexibility

The OT11141 is COM Express® mini carrier card that provides access to all I/O from the NTX7642 processor card in a compact, lightweight form factor.

It provides the ability for integration testing, development and deployment. I/O breakout includes HDMI/DP video, HD Audio, serial, & USB 3.0/2.0.

The OT11141 is designed to be rugged for a variety of operating environments with an extended operating temperature range from -40° to +85°C. It is ideally suited for a wide range of military, commercial or industrial applications.


### Features

- COM Express® mini form factor (55mm x 84mm)
- Two 3Gb/s SATA ports
- HDMI/DP Video Connection
- HD Audio
- 4x 1 Gb Base T
- One USB 3.0 Port
- One USB 2.0 Port
- USB OTG port
- Mini PCIe or mSATA slot
- One Serial Port
- One GPIO Port



# Block Diagram

OT11141

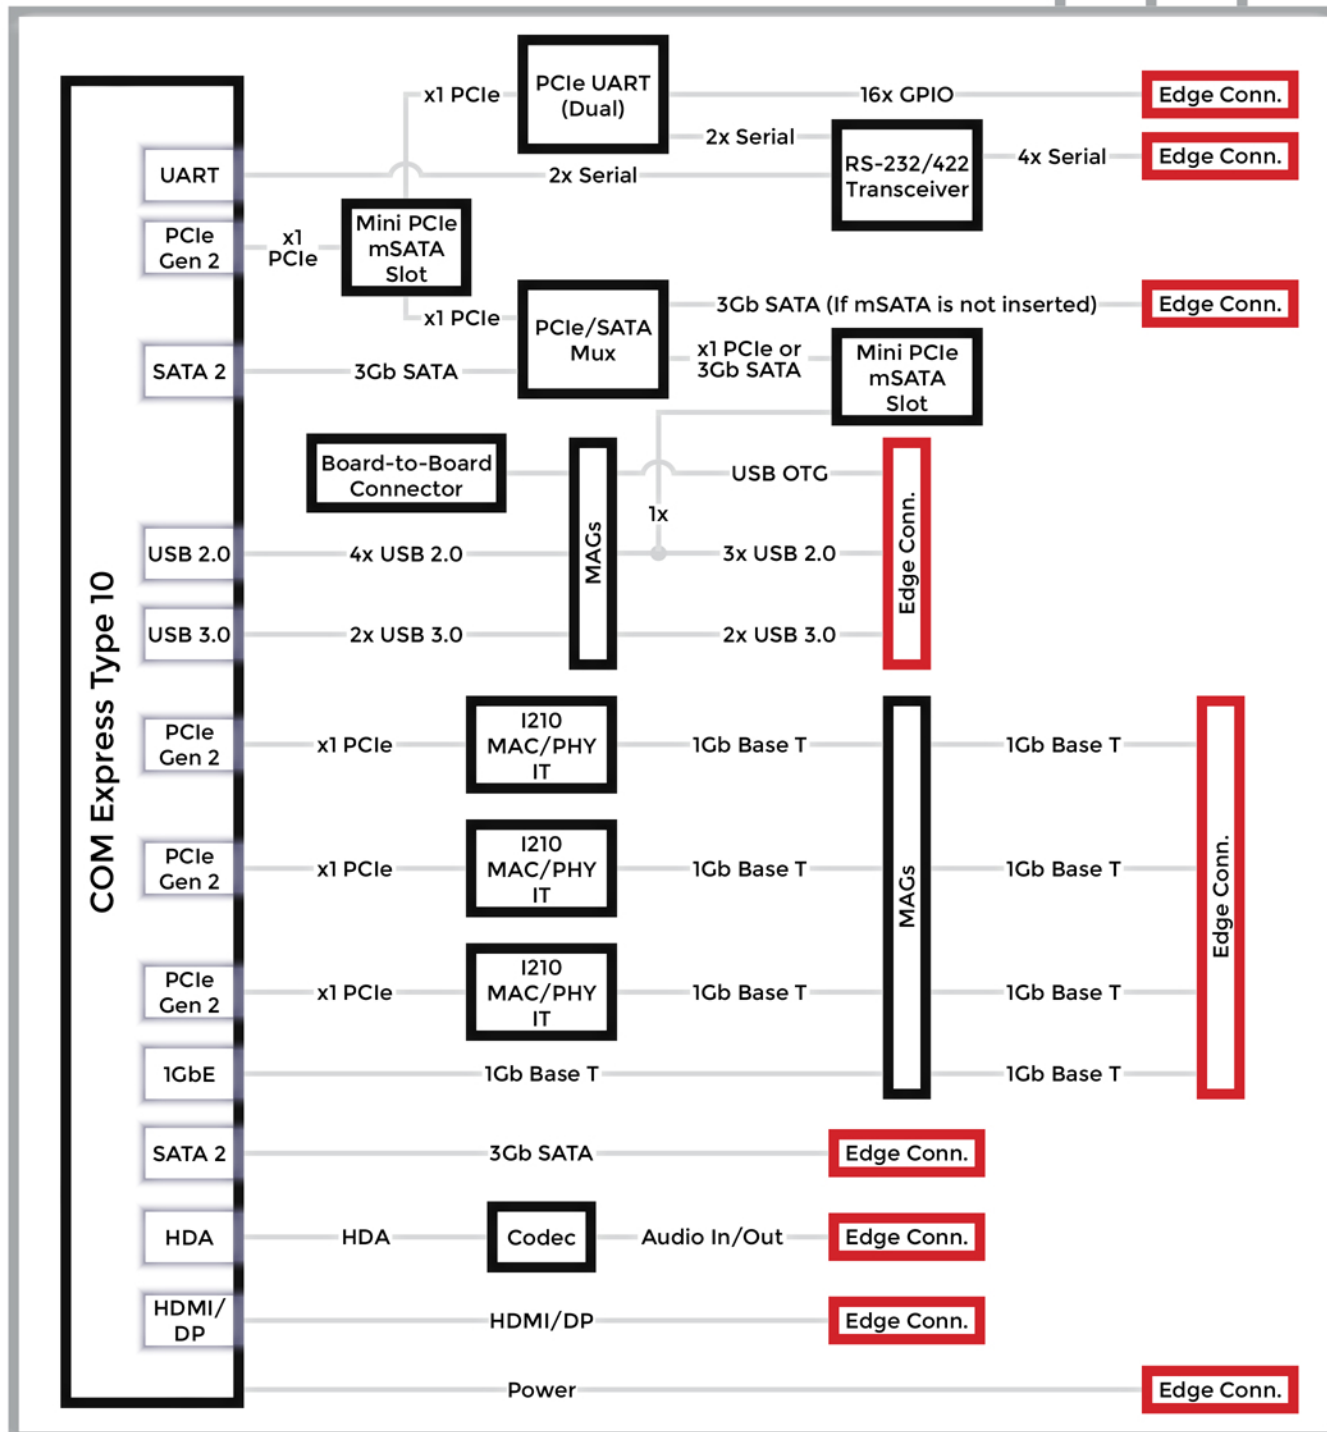

A Phoenix Mecano Company

12605 Challenger Pkwy, Suite 130  
Orlando, FL 32826

Tel: (407) 476-2120  
Fax: (407) 203-7659  
Email: [info@oriontechnologies.com](mailto:info@oriontechnologies.com)

103-1141-001C